

SBE Manual V7.5

[Start](#) | [Queues](#) | [Data Folders](#) | [Archive](#) | [Setup](#) | [Submit](#)
[Associated Files](#) | [Other Add-ons](#) | [Related Batch Processes](#) | [Special Forms](#)

Submit Methods

- ▶ [Activity Monitor](#)
- ▶ [Network](#)
- ▶ [Named Pipe](#)
- ▶ [LPR Printers](#)

Submit Queue via LPR Printer

FTSpooler supports the Line Printer (LP) protocol by acting as an LP Daemon (LPD). FTSpooler acts like a printer. The LP protocol is a special way of printing data across a TCP/IP network and is most commonly found on UNIX systems, although it is supported by all major network operating systems, including AS/400.

The LP protocol enables you to print a document located on one machine to a printer attached to another machine on the network (a network printer).

[More information on Configuring Data Input of the Queue](#)

[More information on Line Printer Setup](#)

Printing from Windows Applications

In Windows-based systems create an LPR printer port for Windows applications to be able to "print" jobs to an LP Server. These printers act as redirection tools so that applications can print to the FTSpooler queues. It will help to think of them as "Virtual" printers as they have no direct connection to a physical printer.

Before creating your LPR printers it is necessary to create the corresponding queues in FTSpooler. The name(s) of the FTSpooler queue(s) will be used when creating the LPR port.

[More information on Creating a FTSpooler Queue](#)

For Windows XP:

Ensure the following prerequisites are in place before you get started:

- You have the administrator rights.
- **LPR Port** is installed.
[More information on How to Step Up an LPR Port on your PC.](#)
- FTSpooler Version 5 or above is installed.


Configuration steps:

- Select **Printer and Fax** from the **Start** menu.
- Click on **Add a Printer** in the left bar.




- Click **Next** and choose **Local Printer** in the **Add Printer Wizard**. Do ensure the **Automatically detect and install my Plug and Play printer** box is not checked

down menu.

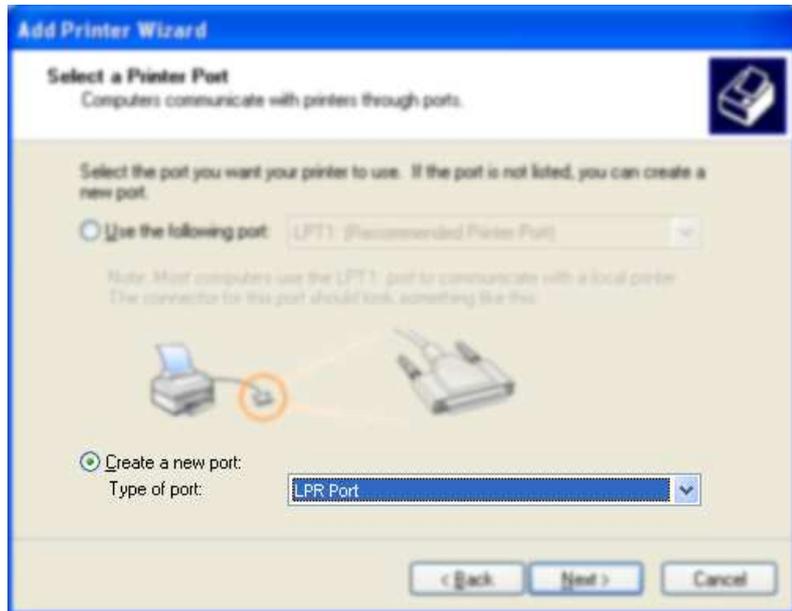

- In the **Name or address of server providing LPD** text box, enter the IP address of the machine on which FTSpooler is installed (e.g.192.168.0.1). In the **Name of printer or print queue on that server** text box, enter the queue name defined in FTSpooler. Click **OK**.
- Choose the printer driver according to the final destination printer, and then click **Next**.
- Enter the printer name in the **Printer Name** text box. We recommend clearly labelling this as a "virtual" FormTrap queue by using the following format: **Q_location** to a **MAXIMUM of TWELVE characters**. Click **Next**.
- Select the **Share as** option and use the same printer name used in step above. Click **Next**.

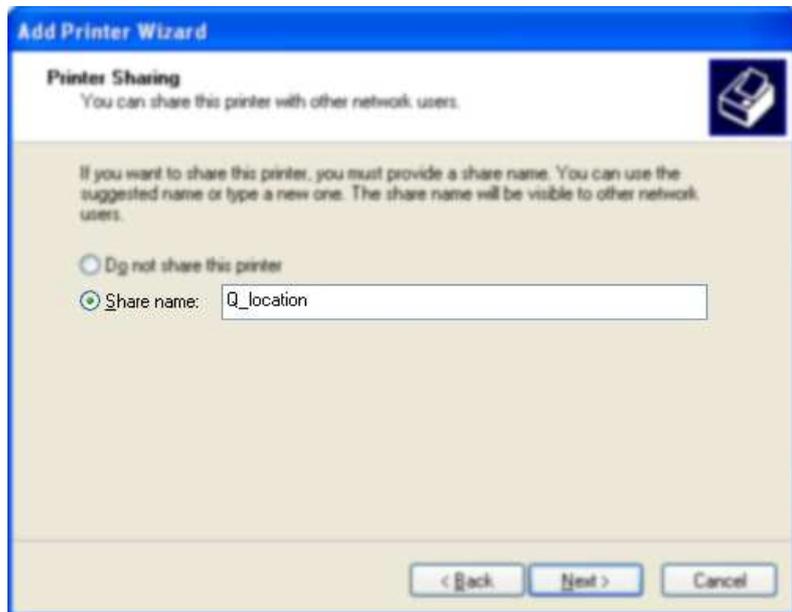

- In the **Location and Comment** window, enter related information and then click **Next**.
- Select **No** on Print Test Page and click **Next**.
- Click **Finish** button to complete the installation.

Setup process may alter for different operating system.

[Top](#)

Printing from UNIX applications

These printers act as redirection tools so applications can print to the FTSpooler queues. Before creating your LPR printers create the corresponding queues in FTSpooler. The name(s) of the FTSpooler queue(s) are used when creating the LPR port.

according to their basic printing subsystem. Use the table below as a reference guide when setting up Unix Systems for use with FormTrap.

System V	BSD
SCO Open Server	Linux
SCO Unix Ware	FreeBSD (Linux Binary)
Sun Solaris	HP/Compaq/DEC Tru64
HPUX	

IBM AIX is a special case and does not fall under either category. Please [contact us](#) to configure FormTrap to run on IBM AIX.

For a System V UNIX print subsystem:

Description of steps	Commands
Configure your PATH environment variable:	<code>PATH=\$PATH:/usr/bin:/usr/sbin</code>
Shut down the print subsystem:	<code>lpshut</code>
Create the print queue: This creates local print queue named <code>ftqueue</code> headed for the remote print queue <code>(rp=) ftqueue</code> on the remote machine <code>(rm=) nt_server</code> .	<code>lpadmin -pftqueue -v/dev/null -mmodel -icmrcmodel -osmrsmodel -ob3 -ormnt_server -orpftqueue</code> This should be typed as one lone line.
Enable the new queue for use:	<code>enable ftqueue</code> <code>accept ftqueue</code> Ensure that you are running the program <code>/usr/bin/enable</code> and not a shell builtin of the same name.
Bring the print subsystem back up:	<code>lpsched</code>
To view and check the configuration and status of this queue:	<code>lpstat -pftqueue</code>
Print to this Queue	
To print to this queue use the command:	<code>lp -dftqueue myfile</code>

For a BSD UNIX print subsystem:

Description of steps	Commands
Define the print queue Define a print queue headed to the remote <code>lpr</code> print queue created by FTSpooler. Printers are defined in the file <code>/etc/printcap</code> . Different X-Windows systems will provide programs to interface to the <code>printcap</code> file for ease of editing. These instructions assume that file the file is edited using a simple command line editor such as <code>pico</code> or <code>vi</code> . Insert the command in the right column into the <code>print cap</code> file: This creates a local print queue named ftqueue , headed for the remote print queue <code>(rp=) ftqueue</code> on the remote machine <code>(rm=) nt_server</code> . The path <code>/var/spool/lpd/ftqueue</code> on the right may be incorrect depending on the system settings. Copy the path from another entry if possible, or see <code>man lpr</code> , which should tell you your UNIX normal path. You may also need to manually create the directory <code>/var/spool/lpd/ftqueue</code> . Use existing entries as a guide.	<code>ftqueue:\</code> <code> :sd=/var/spool/lpd/ftqueue:\</code> <code> mx#0:\</code> <code> :sh;\</code> <code> :rm=nt_server:\</code> <code> :rp=ftqueue:</code>
Print to this Queue	
To print to this queue use the command:	<code>lp -p -lmyfile</code>

[Top](#)

application to directly output data to these "virtual printers".

To configure the printer in your application:

- In the printer setup of your program, create new printers to direct output to FormTrap. These should have a meaningful name, or use the same name as the "virtual" printer defined above.

More information on Printing from Windows Applications


- For each printer, the device path settings must point to the appropriate LPR printer just created.

[Top](#)


Instructions on how to set up the LPR port in your PC

For Windows XP:

- Go to **Start** menu - **Control Panel**, choose **Add or Remove Programs**.
- Choose **Add/Remove Windows Components** and the **Windows Components Wizard** pops up. Check **Other Network File and Print Services** option if not selected, then press the **Details** button.

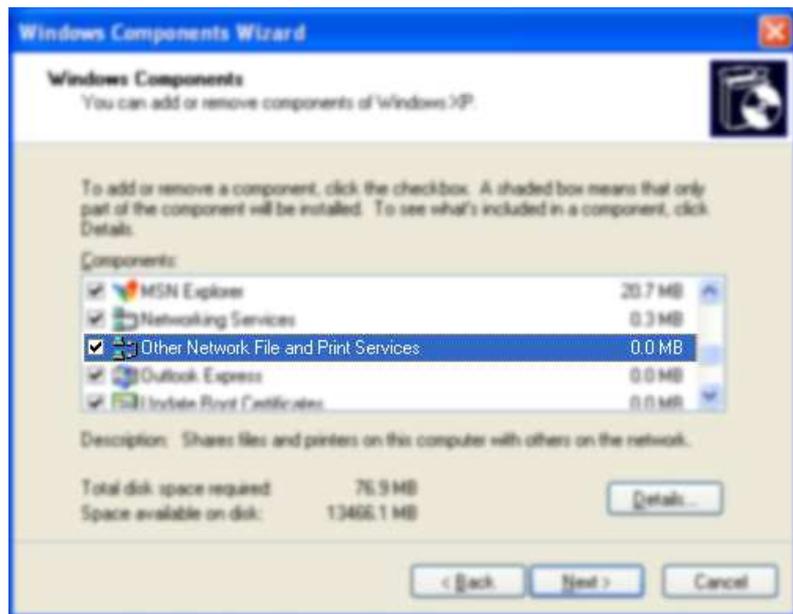

- There will be a list of available subcomponents of **Other Network File and Print Services** in your PC, choose the one called **Print Services for Unix**. Then click **OK**.

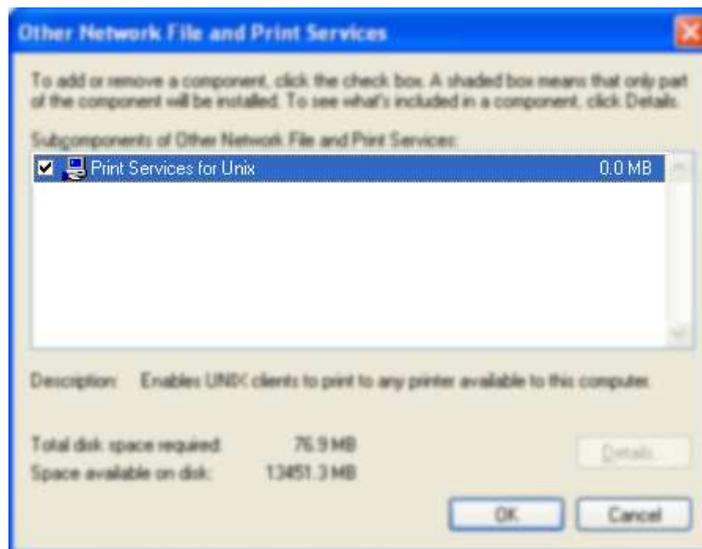

- Click **Next** in the **Windows Components Wizard** Screen to finish installation.

[Top](#)

