



FTDesign Manual V7.5

[Theory & Decisions](#) |
 [Tools & Options](#) |
 [Printline or Records mode](#)
[Design & Objects](#) |
 [Masking & Font Change](#) |
 [Projects](#) |
 [Testing & Viewing](#)
Repaginator |
 [FTSplitDef](#) |
 [Registry Update](#) |
 [Special Forms](#)

FormTrap Repaginator


- ▶ Overview
- ▶ **Loading a Sample Data File**
- ▶ Entry
- ▶ Tools
- ▶ Running Repaginator from Command Line

Loading a Sample Data File


Before creating your repagination rules you need a sample data file open. If FTDesign had a sample data file loaded it is displayed, otherwise open a sample data file. You can change the sample data file at any time by opening a new sample data file.

To open a sample data file to create your repagination rules with:

- Select **Open Data File** from the **File** menu or click the **Open** data file tool button on the toolbar.
- The **Open** dialog box opens. **Browse** and select the sample data file you wish to open.
- Select one of the **Ascii/Unicode conversion** options. **Auto** is the normal option.

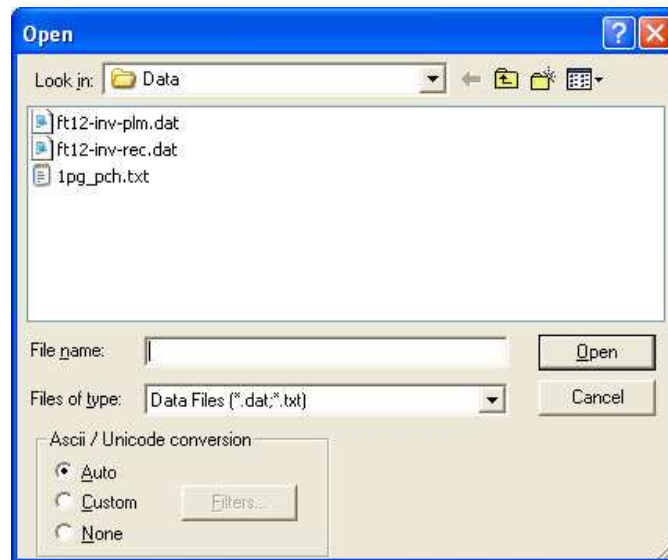

- Your sample data file will now be loaded into the **Mapping window** of the FormTrap Repaginator.

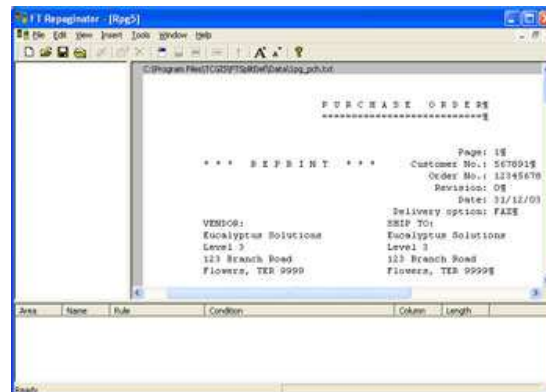

[Top](#)

[Disclaimer](#) | [Home](#) | [About Us](#) | [News](#) | [Products](#) | [Customers](#) | [Free Trial](#) | [Contact Us](#) | [Success Stories](#)

Copyright © 1995-2011 TCG Information Systems Pty. Ltd. All rights reserved.